





AL-80-40-HD+F



air bearing data at	4 bar	5 bar	6 bar
recommended max. load	→ 750 N	960 N	1160 N
recommended preload	→ 490 N	620 N	750 N
gap ¹	→ 9 μm	8.5 μm	8 μm
static stiffness ¹	→ 90 N/μm	120 N/μm	150 N/μm
max. static stiffness	→ 115 N/μm	150 N/μm	190 N/μm
tilt stiffness ^{1,2}	→ -	-	-
unrestricted airflow	→ 3.9 sl/min	4.6 sl/min	5.4 sl/min
specification			
weight	→ 160 g		
guiding surface	→ Ra 0.2		
air quality	→ attachment		
air pressure	→ max. 9 bar		
accessories	→		
¹ at recommended load ² measured at the edge of the bearing			
application			
high dynamic			

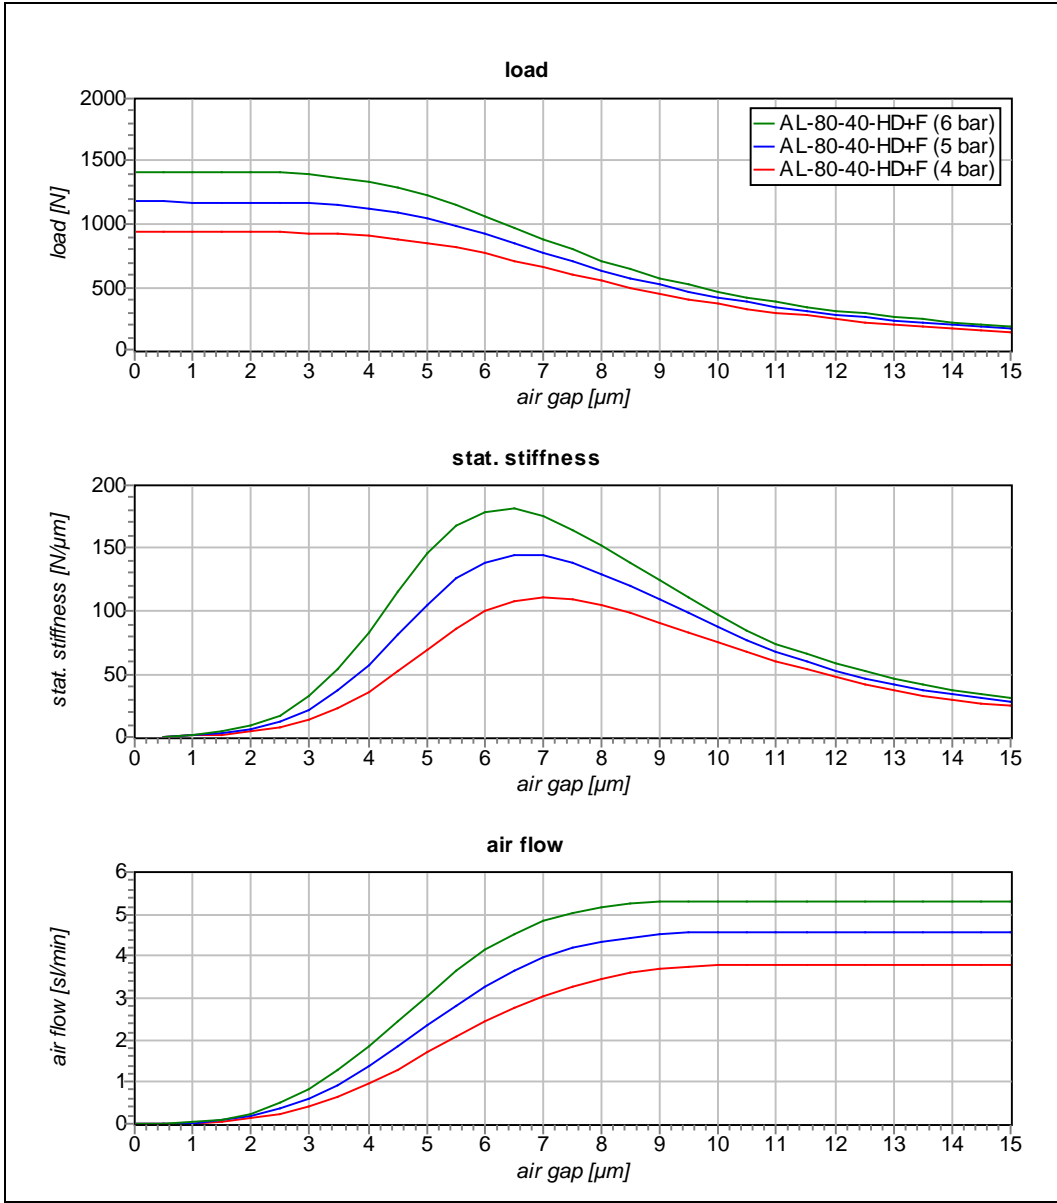



AL-80-40-HD+F

